
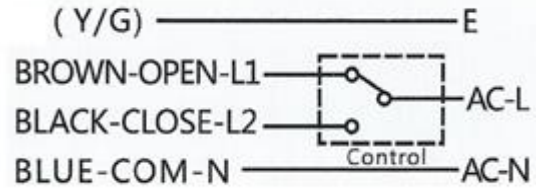




S168-4Y Motor Connecting in 110V High Voltage to C35 1-Channel Wall Switch

Wiring Diagram between Motor S168-4Y and Wall Control C35-C1

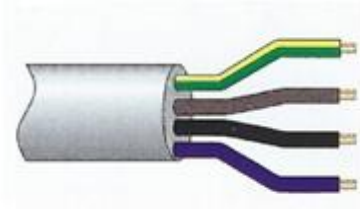

Program the Motor with Wall Switch C35-1 (1 channel)

Open the back cover of Wall Switch C35-1 by pushing the spring lock as following.
The Program/Code button will be uncovered.

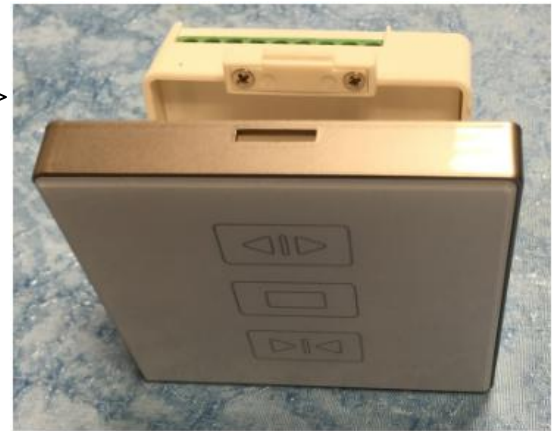

C35-1 Wall Switch



Program/Code button

- Connect the motor to the C35-1 Wall Switch as Fig 1 shows.

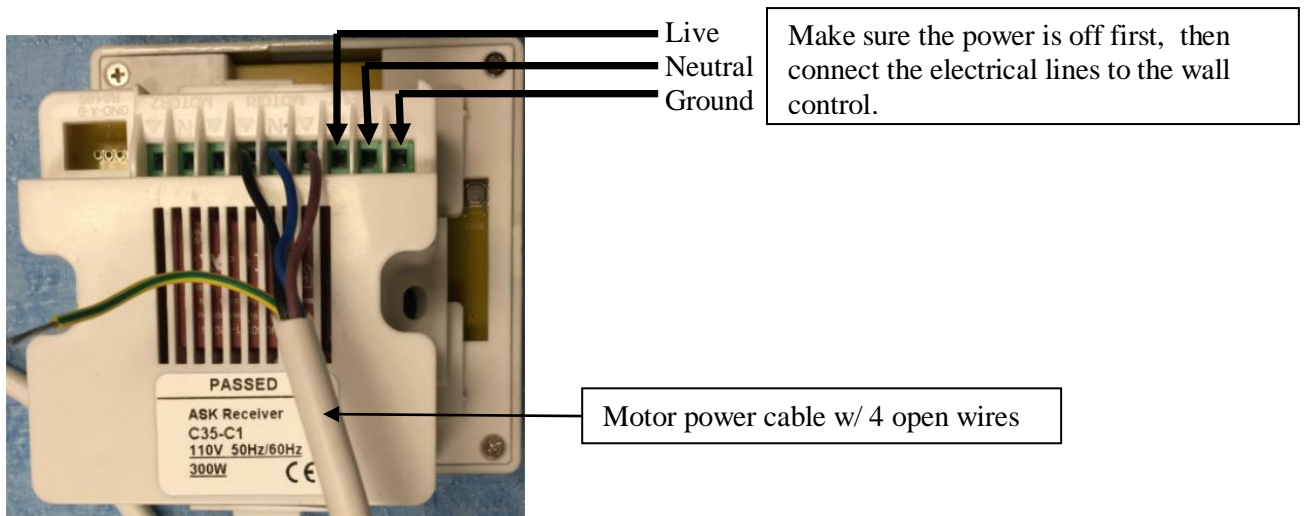


Fig 1 - 1 motor/wall switch wiring diagram

1. On the **Wall Switch**, press & hold the “Program/Code” button until the “Stop” button LED on the front panel flashes.
2. Press this flashing “Stop” button once.
3. Select a Channel # on the Remote Control.
4. Press the “Open” button on the **Remote Control** for a few seconds till the Carrier starts moving. Let it move to the end of the track.(Do NOT stop the Carrier midway). Then Press the “Close” button on the **Remote Control** to let the Carrier moves to the other end of the Track. Repeat the opening/closing one more time.

The Motor itself have detected & decided the carriers’ starting & stopping points. - Now the curtain system is ready for operations: Open, Close or Stop by the Remote Control and Wall Control.

For further inquiry please contact: ElectricDraperyRod@gmail.com